
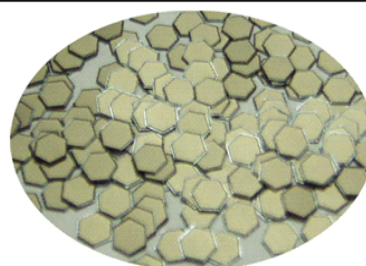


规格:
SPECIFICATION


类别 Type	正方形 Square		正六边形 Hexagon	
	mm	mil	mm	mil
SMA	1.15	45		
	1.19	47		
SMB	1.45	57	1.47	58
SMC	2.45	97	2.65	104
SMD	3.3	130		
DO-41	1.07	42		
	1.12	44		
	1.15	45.3		
	1.17	46		
	1.19	47		
	1.23	48		
	1.32	52		
DO-15	1.45	57	1.73	68
	1.65	65		
DO-201AE	2.4	95		
	2.45	96.5		
	2.5	98.4		
DO-201AD	2.28	90		
P-600			3.08	122
			4.25	167
			5.6	220
AUTO			5.6	220

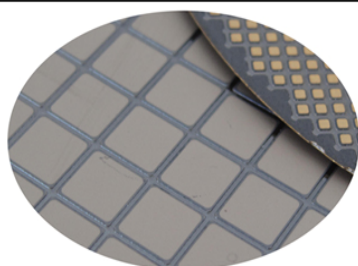

[GPP晶粒规格]

产品外形尺寸:

Product appearance size

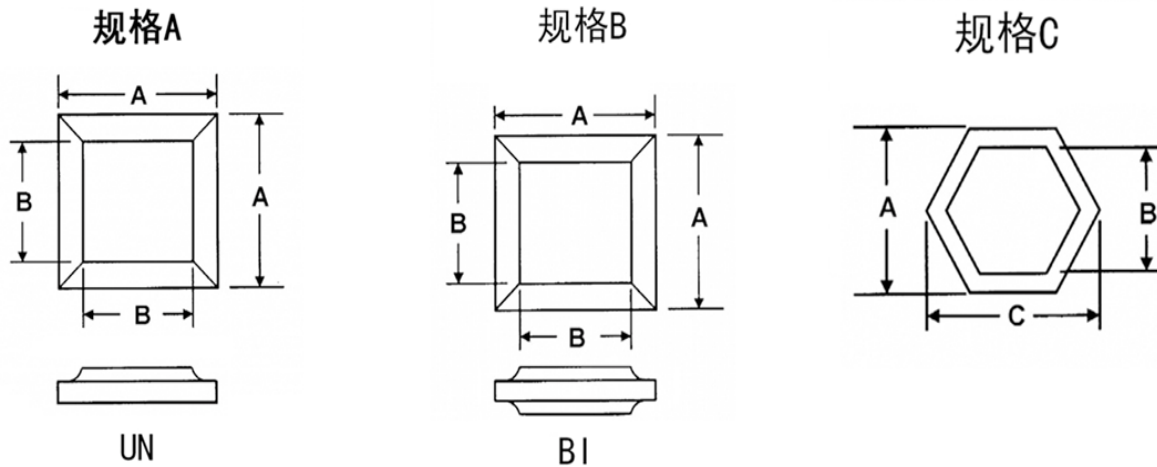

规格:

SPECIFICATION

类别 Type	P4KE SMA mil	P6KE SMB mil	SA mil	1.5KE SMC mil	3KP SMD mil	5KP mil	15KP 20KP 30KP mil
A	50±2	70±2	70±2	100±2	167±2	167±2	220±2
B	31±2	53±2	53±2	82±2	147±2	147±2	206±2
C					192±2	192±2	254±2
T(UN)	11	11	11	11	11	11	11
T(BI)	15.5	15.5	15.5	15.5	15.5	15.5	15.5

注释:

我公司可根据客户需求生产下列产品扩散片及GPP晶粒，晶粒尺寸可根据客户要求生产。

产品类型包括:

A、TVS 扩散片及GPP晶粒：电压范围6.8V-220V；

B、ZENER扩散片及GPP晶粒：电压范围6.8V-200V；

C、STD、FR、HER、UF、SF等高低频整流器、快恢复整流器、超快恢复整流器扩散片及GPP晶粒。

Note:

Our company can according to customer demand production to produce the following product diffusion and GPP grain, grain size can be produce according to customer requirements.

Product types include:

A, the proliferation of TVS and GPP grain: voltage range 6.8 V to 220 V ;

B, ZENER diffusion and GPP grain : voltage range 6.8 V to 200 V ;

C, STD, FR, its ehers, UF, SF, such as low frequency rectifier, fast recovery rectifiers, super fast recovery rectifier diffusion and GPP grain .