

特性/机械性能:
FEATURES/MECHANICAL DATE

- ◆ 小电流下的快恢复高压整流二极管

Small electrical flow fast recovery high voltage rectifier diode

- ◆ 高可靠性 High reliability

- ◆ 耐焊接热250℃ Resistance to welding heat: 250 °C

- ◆ 封装: 模塑封装 Case: Molded plastic

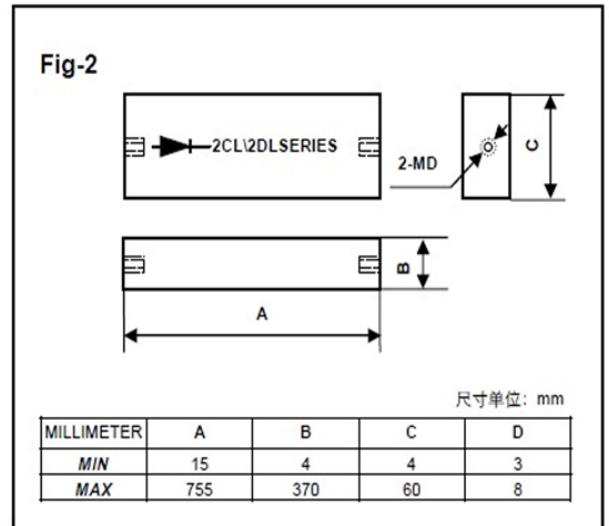
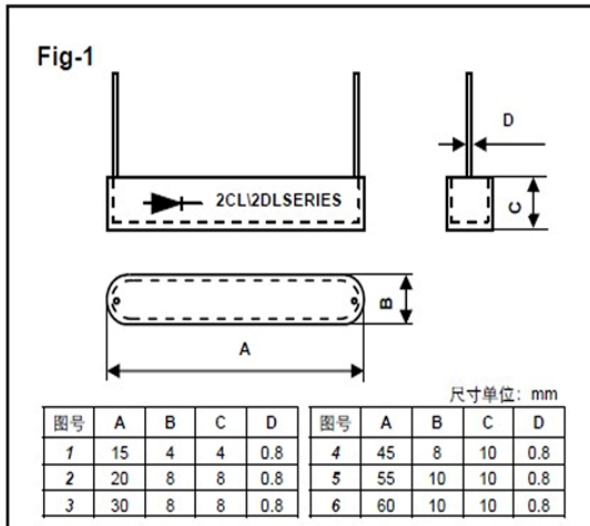
- ◆ 塑封材料: 采用UL94V-O认可的阻燃环氧料

Epoxy: UL94V-0 rate flame retardant

- ◆ 引线: 电镀轴式引线可焊性符合MIL-STD-202E, 方法208

Lead: Axial lead solderable per MIL-STD-202,methode 208 guaranteed

- ◆ 安装位置: 任意 Mounting position:Any


产品外形尺寸:
Product appearance size


最大额定值及电气特性
MAXIMUM RATINGS AND CHARACTERISTICS

测量环境温度为25℃, 除非另有规定. 单相半波, 50HZ, 阻性或感性负载, 对于容性负载, 电流降额20%.
 Rating at 25℃ ambient temperature unless otherwise specified. Single phase, half wave, 50HZ, resistive or inductive load. For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOL	2CL 2	2CL 4	2CL 5	2CL7.5	2CL 10	2CL 20	2CL 25	2CL 30	UNITS
Maximum Average Forward Rectified Current Ta=75℃	IF (AV)	0.005								A
Maximum Recurrent Peak Reverse Voltage	VRRM	2	4	5	7.5	10	20	25	30	KV
Maximum Instantaneous Forward Voltage Ta = 25℃	VF	6	10	10	12	12	25	35	35	V
Forward current overload ratio T = 0.01 sec	SMF	20								倍
Maximum DC Reverse Current Ta = 25℃ Ta = 125℃	IR	5.0 50								μ A μ A
Maximum Reverse Recovery Time	Trr	-								us
Product appearance	A×B×C	15× 4×4	15× 4×4	20× 8×8	20× 8×8	30× 8×8	45× 8×10	55× 10×10	60× 10×10	mm

TYPE NUMBER	SYMBOL	2CLG 2	2CLG 4	2CLG 6	2CLG7.5	2CLG10	2CLG20	2CLG25	2CLG30	UNITS
Maximum Average Forward Rectified Current Ta=75℃	IF (AV)	0.005								A
Maximum Recurrent Peak Reverse Voltage	VRRM	2	4	6	7.5	10	20	25	30	KV
Maximum Instantaneous Forward Voltage Ta = 25℃	VF	15	20	20	30	30	50	60	60	V
Forward current overload ratio T = 0.01 sec	SMF	20								倍
Maximum DC Reverse Current Ta = 25℃ Ta = 125℃	IR	3.0 10								μ A μ A
Maximum Reverse Recovery Time	Trr	1.0								us
Product appearance	A×B×C	15× 4×4	15× 4×4	20× 8×8	20× 8×8	30× 8×8	45× 8×10	55× 10×10	60× 10×10	mm

