

包装规范 Packaging Specification

盒装 BULK PACKING (B / P)

产品型号 TYPE	数量 / 盒 Q'TY/BOX (PCS)	包装盒规格 BOX SIZE (mm) (外径)	数量 / 箱 Q'TY/CARTON (PCS)	包装箱规格 CARTON SIZE (mm) (内径)	毛重 GROSS WEIGHT (Kg)
D0-41	1000	200×85×20	50×1000	445×205×230	19.0
D0-15	500	200×85×20	50×500	445×205×230	17.5
17-02	500	200×85×20	50×500	445×205×230	18.8
D0-201AD (E)	500	300×75×40	24×500	305×305×250	17.1 (14.2)
P-600	250	300×75×40	24×250	305×305×250	14.3

编带盒装 AMMO PACKING (T / B 52)

产品型号 TYPE	数量 / 盒 Q'TY/BOX (PCS)	包装盒规格 BOX SIZE (mm) (外径)	数量 / 箱 Q'TY/CARTON (PCS)	包装箱规格 CARTON SIZE (mm) (内径)	毛重 GROSS WEIGHT (Kg)
D0-41	3000	250×75×115	15×3000	390×255×355	17.0
	5000	250×75×147	10×5000	390×255×300	20.6
D0-15	2000	250×75×115	15×2000	390×255×355	15.0
	3000	250×75×147	10×3000	390×255×300	15.0
17-02	2000	250×75×115	15×2000	390×255×355	16.0
D0-201AD (E)	1000	250×75×115	15×1000	390×255×355	22.2
	1250	250×75×147	10×1250	390×255×300	17.0
P-600	400	250×75×147	10×400	390×255×300	10.5

编带盘装 REEL PACKING (T / R 52)

产品规格 CASE TYPE (Outline)	数量 / 盘 Q'TY/REEL (PCS)	包装盘规格 REEL DIA (mm) / (inch)	数量 / 箱 Q'TY/CARTON (PCS)	包装箱规格 CARTON SIZE (mm)	毛重 GROSS WEIGHT (Kg)
D0-41	5000	330 (13)	4×5000	338×338×330	13.0
D0-15	4000	330 (13)	4×4000	338×338×330	12.5
17-02	4000	330 (13)	4×4000	338×338×330	12.5
D0-201AD (E)	1500	330 (13)	4×1500	338×338×330	13.0
P-600	500	330 (13)	4×500	338×338×330	7.45

贴片盘装 REEL PACKING

产品规格 CASE TYPE (Outline)	数量 / 盘 Q'TY/REEL (PCS)	包装盘规格 REEL DIA (mm) / (inch)	数量 / 盒 Q'TY/BOX (PCS)	包装盒规格 BOX SIZE (mm) (外径)	数量 / 箱 Q'TY/CARTON (PCS)	包装箱规格 CARTON SIZE (mm) (内径)	毛重 GROSS WEIGHT (Kg)
SMA	1500	178 (7)	5×1500	190×190×90	8×5×1500	385×195×375	8.5
	5000	330 (13)	4×5000	340×340×90	4×4×5000	345×345×375	11.0
SMB	750	178 (7)	5×750	190×190×90	8×5×750	385×195×375	7.5
	3000	330 (13)	4×3000	340×340×90	4×4×3000	345×345×375	10.5
SMC SMD	500	178 (7)	4×500	190×190×90	8×4×500	385×195×375	8.0
	3000	330 (13)	4×3000	340×340×90	4×4×3000	345×345×375	16.5
SOD-123	3000	178(7)	5×3000	190×190×70	10×5×3000	375×190×365	9.5

轴向产品编带盒装/盘装 (T/B 52; T/R52)


AMMO/ REEL PACKING SPECIFICATION FOR AXIAL LEAD DIODES

尺寸单位 Dimensions in mm (inch)

产品规格 CASE TYPE (Outline)	符 号 SYMBOL	D0-41	D0-15	17-02	D0-201AD (E)	P-600
产品间距 COMPONENT PITCH	A	5.0±0.5 (0.197±0.0197)	5.0±0.5 (0.197±0.0197)	5.0±0.5 (0.197±0.0197)	10.0±0.5 (0.394±0.0196)	10.0±0.5 (0.394±0.0196)
胶带内侧间距 INNER TAPE PITCH	B	52.4±1.5 (2.063±0.059)	52.4±1.5 (2.063±0.059)	52.4±1.5 (2.063±0.059)	52.4±1.5 (2.063±0.059)	52.4±1.5 (2.063±0.059)
间距累计偏差 CUMULATIVE PITCH TOLERANCE	—	2.0mm/10pich (0.08/10pich)	2.0mm/10pich (0.08/10pich)	2.0mm/10pich (0.08/10pich)	2.0mm/10pich (0.08/10pich)	2.0mm/10pich (0.08/10pich)
产品偏位 COMPONENT ALIGNMENT	Z	1.2max (0.047 max)	1.2max (0.047 max)	1.2max (0.047 max)	1.2max (0.047 max)	1.2max (0.047 max)
编带纸宽度 TAPE WIDTH	T	6.0±0.4 (0.236±0.016)	6.0±0.4 (0.236±0.016)	6.0±0.4 (0.236±0.016)	6.0±0.4 (0.236±0.016)	6.0±0.4 (0.236±0.016)
胶带错位 EXPOSED ADHESIVE	E	0.8max (0.032max)	0.8max (0.032max)	0.8max (0.032max)	0.8max (0.032max)	0.8max (0.032max)
管体偏心率 BODY ECCENTRICITY	L1-L2	1.0max (0.040 max)	1.0max (0.040 max)	1.0max (0.040 max)	1.0max (0.040 max)	1.0max (0.040 max)
卷盘外径 REEL OUTSIDE DIAMETER	D	330 (13.0)	330 (13.0)	330 (13.0)	330 (13.0)	330 (13.0)
卷盘内径 REEL INNER DIAMETER	D1	85.7±0.3 (3.374±0.012)	85.7±0.3 (3.374±0.012)	85.7±0.3 (3.374±0.012)	85.7±0.3 (3.374±0.012)	85.7±0.3 (3.374±0.012)
传送孔径 FEED HOLE DIAMETER	D0	16.6±0.4 (0.654±0.016)	16.6±0.4 (0.654±0.016)	16.6±0.4 (0.654±0.016)	16.6±0.4 (0.654±0.016)	16.6±0.4 (0.654±0.016)
卷盘宽度 REEL WIDTH	W	79.0±1.0 (3.110±0.040)	79.0±1.0 (3.110±0.040)	79.0±1.0 (3.110±0.040)	79.0±1.0 (3.110±0.040)	79.0±1.0 (3.110±0.040)


编带尺寸 TYPE DIMENSIONS

(轴向二极管 AXIAL LEAD DIODES)

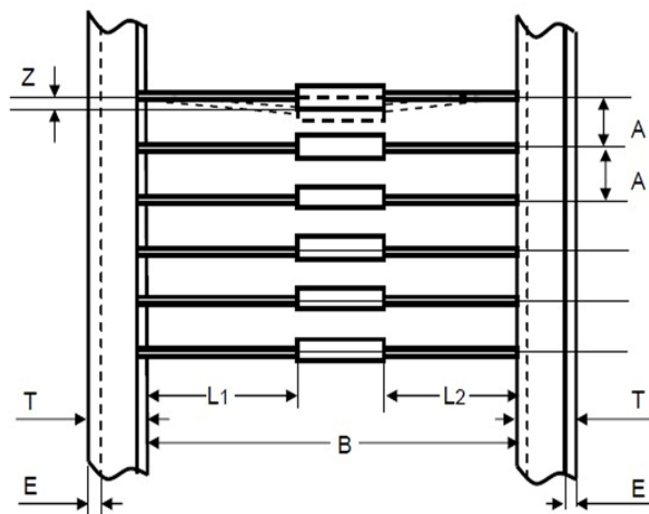

卷盘 REEL PACKAGING

(轴向二极管 AXIAL LEAD DIODES)

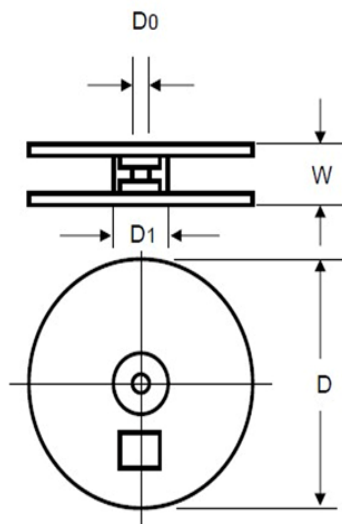




包装规范 Packaging Specification

表面贴装产品包装规范 REEL PACKING SPECIFICATIONS FOR SURFACE MOUNT DEVICES




尺寸单位 Dimensions in mm (inch)

产品规格 CASE TYPE (Outline)	符号 SYMBOL	DO214AC (SMA)	DO214AA (SMB)	DO214AB (SMC)
口袋宽度 CARRIER WIDTH	A0	2.79±0.10 (0.110±0.004)	3.80±0.10 (0.150±0.004)	6.50±0.10 (0.256±0.004)
口袋长度 CARRIER LENGTH	B0	5.33±0.10 (0.210±0.004)	5.40±0.10 (0.213±0.004)	8.00±0.10 (0.315±0.004)
口袋深度 CARRIER DEPTH	K0	2.36±0.05 (0.093±0.002)	2.45±0.05 (0.096±0.002)	2.50±0.05 (0.100±0.002)
承载带厚度 TOTAL TAPE THICKNESS	t	0.30±0.05 (0.012±0.002)	0.30±0.05 (0.012±0.002)	0.30±0.05 (0.012±0.002)
承载带宽度 TAPE WIDTH	W	12.00±0.10 (0.472±0.004)	12.00±0.10 (0.472±0.004)	16.00±0.10 (0.630±0.004)
口袋孔距 PUNCH HOLE PITCH	P	4.00±0.10 (0.157±0.004)	8.00±0.10 (0.315±0.004)	8.00±0.10 (0.315±0.004)
定位孔距 SPROCKET HOLE PITCH	P0	4.00±0.10 (0.157±0.004)	4.00±0.10 (0.157±0.004)	4.00±0.10 (0.157±0.004)
定位孔位 SPROCKET HOLE POSITION	E	1.75±0.10 (0.069±0.004)	1.75±0.10 (0.069±0.004)	1.75±0.10 (0.069±0.004)
口袋孔位 PUNCH HOLE POSITION	F	5.50±0.05 (0.217±0.002)	5.50±0.05 (0.217±0.002)	7.65±0.05 (0.301±0.002)
间距位置 PITCH POSITION	P1	2.00±0.05 (0.079±0.002)	2.00±0.05 (0.079±0.002)	2.00±0.05 (0.079±0.002)
定位孔径 SPROCKET HOLE DIAMETER	D	1.55±0.05 (0.061±0.002)	1.55±0.05 (0.061±0.002)	1.55±0.05 (0.061±0.002)
(口袋) 孔径 PUNCH HOLE DIAMETER	D1	1.50±0.10 (0.059±0.004)	1.50±0.10 (0.059±0.004)	1.50±0.10 (0.059±0.004)

SMA-载带 CARRIER TAPE

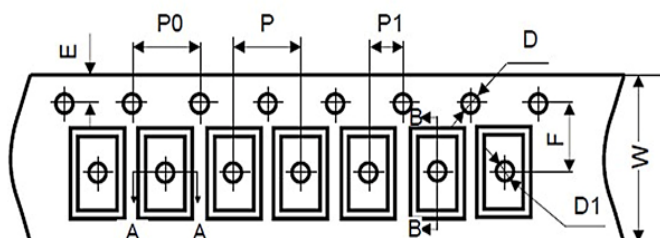

SMB-SMC-载带 CARRIER TAPE

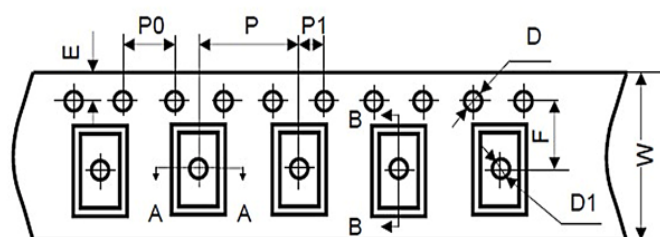

卷盘（表面贴装产品）REEL PACKAGING FOR SURFACE MOUNT DEVICES

尺寸单位 Dimensions in mm (inch)

产品规格 CASE TYPE (Outline)		7-INCH (SMA-SMB)	13-INCH (SMA-SMB)	7-INCH (SMC)	13-INCH (SMC)
卷盘外径 REEL OUTSIDE	G	178±2.0 (7.0±0.079)	330±2.0 (13.0±0.079)	178±2.0 (7.0±0.079)	330±2.0 (13.0±0.079)
卷盘宽度 REEL WIDTH	H	16.8±2.0 (0.661±0.079)	16.8±2.0 (0.661±0.079)	18.5±2.0 (0.728±0.079)	18.5±2.0 (0.661±0.079)
卷盘内部宽度 REEL INNER WIDTH	K	12.5±0.1 (0.492±0.004)	12.5±0.1 (0.492±0.004)	16.5±0.1 (0.650±0.004)	16.5±0.1 (0.650±0.004)
卷盘孔径 REEL HOLE DIAMETER	I	13.0±0.5 (0.512±0.020)	13.0±0.5 (0.512±0.020)	13.0±0.5 (0.512±0.020)	13.0±0.5 (0.512±0.020)
卷盘内径 REEL INNER DIAMETER	J	50±2.0 (2.087±0.079)	75±2.0 (2.953±0.079)	60±2.0 (2.362±0.079)	75±2.0 (2.953±0.079)

表面贴装产品卷盘 REEL PACKAGING FOR SURFACE MOUNT DEVICES (SMA-SMB-SMC)

